


## Counterbalance, standard poppet type differential area

Common cavity, Size 20

VBSN-20A


04.52.25 - X - 58 - Z

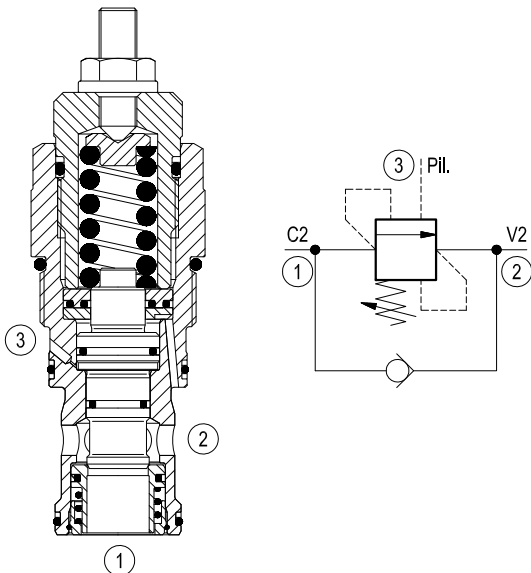

### Description

When pressure at 2 rises above the spring bias pressure, the check seat is pushed away from the piston and flow is allowed from 2 to 1. When load pressure at 1 rises above the pressure setting, the direct-acting, differential area relief function is activated and flow is relieved from 1 to 2. With pilot pressure at 3, the pressure setting is reduced in proportion to the stated ratio of the valve, until fully open with free-flow from 1 to 2. The spring chamber is drained to 2, and any back-pressure at 2 is additive to the pressure setting in all functions.

### Performance

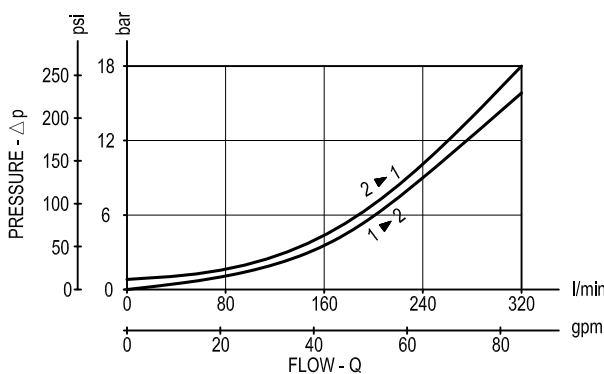

### Technical data


Max. operating pressure	bar (psi)	350 (5000)
Max. flow	l/min. (gpm)	320 (85)
Max. internal leakage (*)	drops/min.	15
Fluid temperature range	°C (°F)	-30 to 100 (-22 to 212)
Installation torque	Nm (ft-lbs)	128-149 (95-110)
Weight	kg (lbs)	1.12 (2.5)
Cavity		CA-20A-3C see data sheet RE 18325-70
Seal kit (**)	code material no.	RG20A9010530100 R901111397
Fluids		Mineral-based or synthetics with lubricating properties at viscosities of 10 to 500 mm <sup>2</sup> /s (cSt)
Filtration		Nominal value max. 10µm (NAS 8) ISO 4406 19/17/14
Installation		No restrictions
Other Technical Data		See data sheet RE 18350-50

Pressure setting: at least 1.3 times the load induced pressure.

(\*) At 70% of pressure setting

(\*\*) Only external seals for 10 valves

### Dimensions

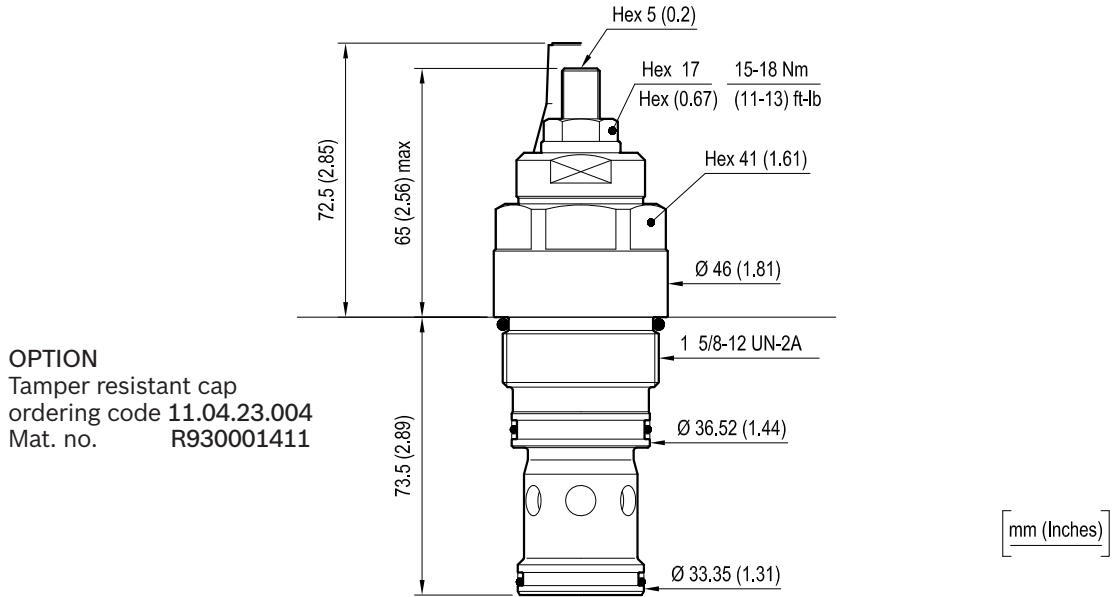

### Ordering code

04.52.25	X	58	Z	00	*
----------	---	----	---	----	---

Counterbalance, standard pop-pet type differential area

Pilot ratio  
 = 03 4:1  
 = 10 8:1

Common cavity, Size 20

Series O/A to L  
 unchanged performances and dimensions

Version and options standard

		SPRINGS		
		Adj. press. range bar (psi)	Pressure increase bar/turn (psi/turn)	Std. setting bar (psi) Q=5 l/min
for X=03	= 20	70-210 (1000-3000)	70 (1015)	200 (2900)
	= 35	140-350 (2000-5000)	108 (1566)	350 (5000)
for X=10	= 20	70-210 (1000-3000)	70 (1015)	200 (2900)
	= 40	140-420 (2000-6000)	135 (1958)	350 (5000)

**Note:** Special settings available. Contact factory authorized representative for ordering code

Type	Material number
045225035820000	R901096052
045225035835000	R901096053
045225105820000	R930000852
045225105840000	R901096057

Type	Material number