



PAG. 5.13.01




05.41.01 - x - y - z

- Filtration level: 25 micron or better.
- Leakage: Leak proof seat design.



50	83,5	14	30	106	44	180	60	14	72	14	40	100	10,5							1"		2,600
40	62,5	10	22	79	34	135	60	10	70	10	38	90	10,5							3/4"		1,420
35	54,5	10	18	62,5	32,5	113	60	8	54	8	32	70	8,5							1/2"		0,905
S	L₅	L₄	L₃	L₂	L₁	L	I	H₄	H₃	H₂	H₁	H	F							y		peso kg weight kg

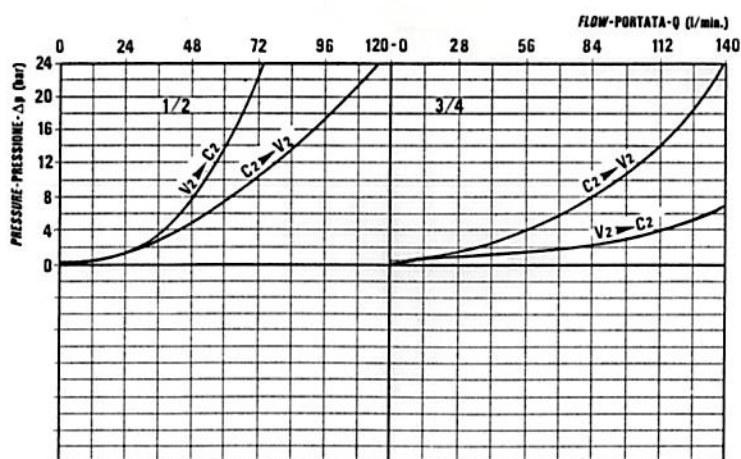

X	RAPPORTO DI PILOTAGGIO PILOT RATIO
03	8,15 : 1
10	3 : 1

[illegible]

Z	MOLLE / SPRINGS			
	Campo taratura min - max bar Adj. press. range bar	Taratura standard bar (Q = 5 l/1') Std. setting bar (made at 5 l/1')	Codice ordinazione Ordering code	Colore Colour
20	60 ÷ 210	160		verde <i>green</i>
35	100 ÷ 350	280		giallo <i>yellow</i>