

**DATI TECNICI / TECHNICAL DATA**


Pressione max. 350 bar  
Max. pressure

Portata max. vedi diagramma  
Flow see performance graph

Taratura della valvola: almeno 1.3 volte superiore alla pressione indotta dal carico

Pressure setting: at least 1.3 times the load induced pressure

39	101	61	28	75	9	127.5	10	71.5	30	50	10	35	90	10.5	15.64x2.62	Ø14	1.74
39	89.5	53.5	27.5	67.5	10	115	10	71.5	14	48	8	32	70	8.5	15.34x2.62	Ø10	1.38
34	85.5	50	25.5	63.5	9	100	11	61	16	40	8	26.5	64	8.5	15.34x2.62	Ø8	0.97
<b>S</b>	<b>L5</b>	<b>L4</b>	<b>L3</b>	<b>L2</b>	<b>L1</b>	<b>L</b>	<b>I1</b>	<b>I</b>	<b>H4</b>	<b>H3</b>	<b>H2</b>	<b>H1</b>	<b>H</b>	<b>F</b>	<b>O ring</b>	<b>Y</b>	<b>Peso kg Weight kg</b>

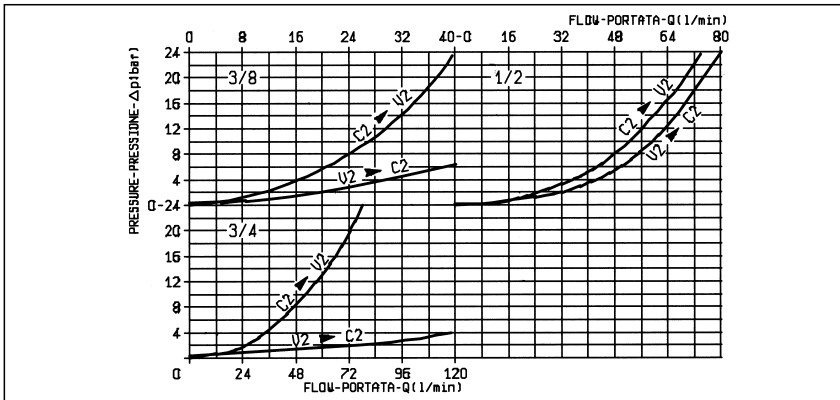

<b>X</b>	<b>RAPPORTO DI PILOTAGGIO PILOT RATIO</b>
<b>03</b>	Ø 10 - 7.6 : 1 Ø 14 - 7.6 : 1
<b>10</b>	Ø 8 - 3.6 : 1 Ø 10 - 3 : 1 Ø 14 - 3 : 1

<b>Z</b>	<b>MOLLE / SPRINGS</b>				
	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (Q = 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
3/8	20	60-210	60	200	03.51.01.075 verde green
	35	100-350	100	350	03.51.01.059 giallo yellow
1/2	20	60-210	68	200	03.51.01.152 verde green
	35	100-350	105	350	03.51.01.142 giallo yellow

<b>Y</b>	<b>ATTACCHI / PORT SIZE</b>	
	V2-C2	PIL
<b>02</b>	Ø 8 (3/8)	Ø 5
<b>03</b>	Ø 10 (1/2)	Ø 5
<b>04</b>	Ø 14 (3/4)	Ø 5