

**PURGE VALVES  
FOR HYDROSTATIC TRANSMISSIONS**

Motor:  
**SAUER SUNSTRAND**  
Type:  
**SM**




**VS-FS-16-4M-A**

**05640601260100A**

DENOMINAZIONE VALVOLA  
VALVE DENOMINATION

CODICE D'ORDINAZIONE  
ORDERING CODE

They are designed for applications on hydrostatic transmissions, where they allow continuous purge by draining to tank a limited controlled flow of used oil. With steel body they are designed for heavy duty application. The flange mounting ensures best efficiency, compact installation and cost saving.

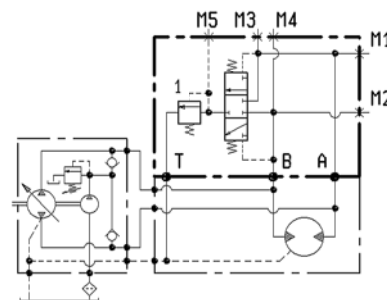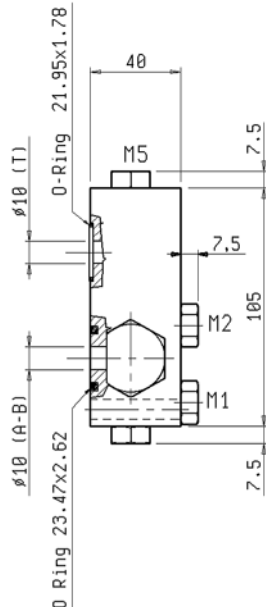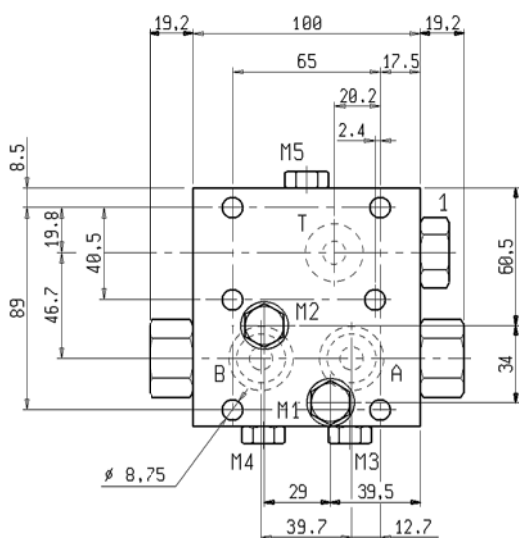

Pressione di lavoro max  
420 bar


Portata max  
100 l/min.

Peso Kg. 3

Max working pressure  
420 bar

Flow max  
100 l/min.

Weight Kg. 3

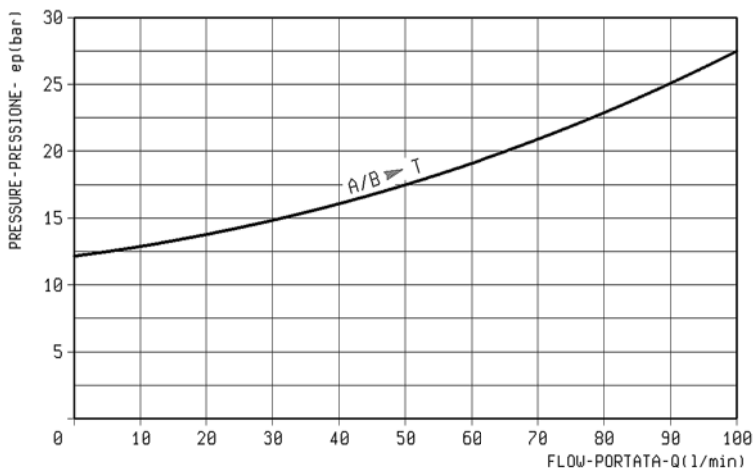



Y	<b>ATTACCHI - PORT SIZE</b>
	FLANGIA / FLANGE
<b>26</b>	SAUER SUNSTRAND