

TECHNICAL DATA

Max. working pressure : 210 bar

Max. flow : 60 l/min

Flangeable on DINAMIC OIL / OILDRIVE motors MG series


Weight : 1.600 kg

Pressure setting:
at least 1.3 times the load induced pressure

NOTE

Composed by:

- subplate p.n. 43.81.08.005
- dual overcentre p.n. 05.42.93.03.03.20 (see page 54.400)

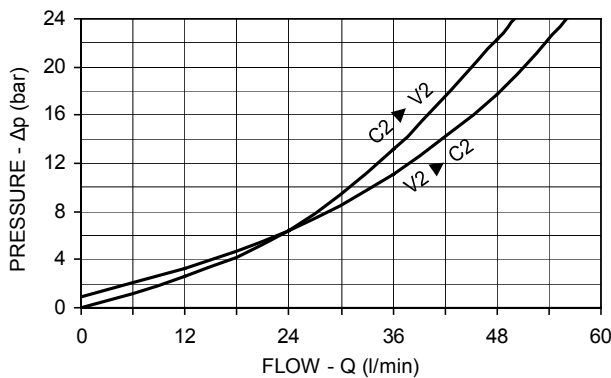

X PILOT RATIO

01 4.2 : 1

02 11 : 1

SPRINGS

		Adj.press. range bar	Press.increase bar/turn	Std.setting bar (Q=5 l/min)	Ordering code	Colour
X	01	60-210	56	200	03.51.01.106	green
	02	60-250	70	250	03.51.01.155	

PORT SIZE

V1-V2-C1-C2	C3
G 1/2	G 1/4