

6 to 12/2 ways/positions bankable flow diverters flangeable

RE 18302-08/12.09

1/10

L711... (VS120F-VS125F)

Size 4

Series 00

Maximum operating pressure 310 bar [4500 psi]

Maximum flow 20 l/min [5.3 gpm]

Ports G 1/4 - SAE4



DVI0089

Summary

Description

General specifications

Ordering details

Spool variants

Principles of operation, cross section

Technical data

 Δp - Q_v characteristic curves

External dimensions and fittings

Electric connection

General specifications

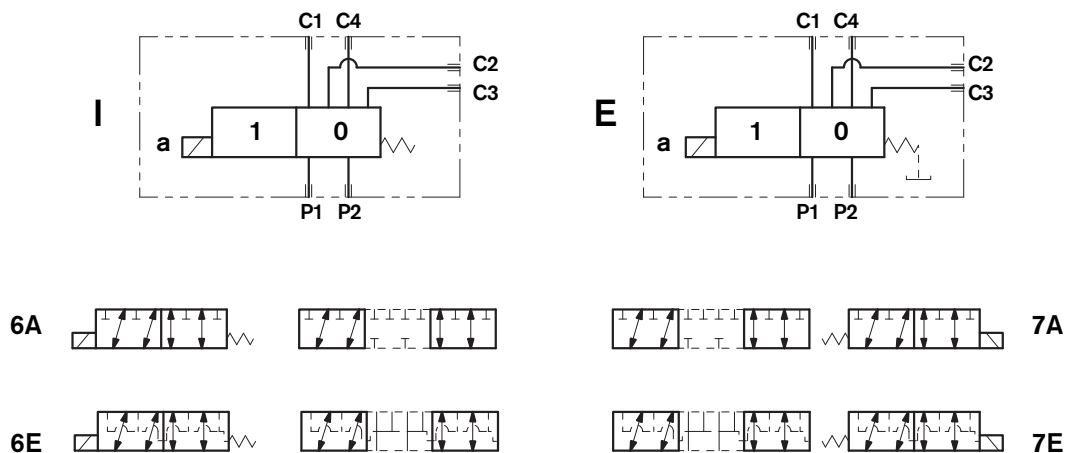
Description	Page
General specifications	1
Ordering details	2
Spool variants	2
Principles of operation, cross section	3
Technical data	3
Δp - Q_v characteristic curves	5
External dimensions and fittings	6
Electric connection	9

- 6 way 2 position valve.
- Directional spool valve with direct solenoid control.
- Upon request, hydraulic / pneumatic pilot.
- Usable as stand-alone, or as multiple stackable units.
- Control spool operated by screwed-in solenoid, with easily extractable coil fastened by a ring nut.
- Wet pin tube for DC coil, with push rod for mechanical override in case of voltage shortage.
- Unrestricted 360° orientation of DC coil.
- Control spool held in normal position by return spring.
- Optional manual override (push-button or screw type).
- Connectors available: DIN 43650 – ISO 4400, AMP Junior, DT04-2P (Deutsch), Free leads.

Ordering details

	L	7	11	_	_ _	_ _	_ _	_ _	_																																																																																										
Family Compact directional valve																																																																																																			
Type Flow Diverters																																																																																																			
Ports G 1/4" DIN3852 = 2 9/16-18 UNF2-B (SAE6) = A																																																																																																			
Control type Solenoid (coil C36) without emergency = 10 Solenoid (coil C36) with push-button type emergency = 1P Solenoid (coil C36) with screw type emergency = 1F Hydraulic / pneumatic control = P1																																																																																																			
Spool Variants 6 way / 2 position P1 side = 6_ 6 way / 2 position P2 side = 7_																																																																																																			
Drain type Internal drain = I External drain = E																																																																																																			
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Assembly</td> <td>0 = Single diverter</td> </tr> <tr> <td>2 = 2 Pre-assembled diverters</td> <td></td> </tr> <tr> <td>3 = 3 Pre-assembled diverters</td> <td></td> </tr> <tr> <td>4 = 4 Pre-assembled diverters</td> <td></td> </tr> <tr> <td>Electric connections</td> <td></td> </tr> <tr> <td>00 = Without coil</td> <td></td> </tr> <tr> <td>01 = With coil, without connector</td> <td></td> </tr> <tr> <td>02 = With coil and with non-assembled connector, type DIN 43650 – ISO 4400</td> <td></td> </tr> <tr> <td>03 = With coil having AMP Junior connector</td> <td></td> </tr> <tr> <td>04 = With coil having AMP Junior Horiz. connector</td> <td></td> </tr> <tr> <td>07 = With coil having DEUTSCH DT 04-2P connect.</td> <td></td> </tr> <tr> <td>31 = With coil and bipolar sheathed lead 350mm [13.8"] long</td> <td></td> </tr> <tr> <td>Voltage supply</td> <td></td> </tr> <tr> <td>00 = Without coil</td> <td></td> </tr> <tr> <td>OB = 12V DC</td> <td></td> </tr> <tr> <td>AD = 13V DC</td> <td></td> </tr> <tr> <td>OC = 24V DC</td> <td></td> </tr> <tr> <td>AC = 27V DC</td> <td></td> </tr> <tr> <td>OD = 48V DC</td> <td></td> </tr> <tr> <td>OE = 110V DC</td> <td></td> </tr> </table>									Assembly	0 = Single diverter	2 = 2 Pre-assembled diverters		3 = 3 Pre-assembled diverters		4 = 4 Pre-assembled diverters		Electric connections		00 = Without coil		01 = With coil, without connector		02 = With coil and with non-assembled connector, type DIN 43650 – ISO 4400		03 = With coil having AMP Junior connector		04 = With coil having AMP Junior Horiz. connector		07 = With coil having DEUTSCH DT 04-2P connect.		31 = With coil and bipolar sheathed lead 350mm [13.8"] long		Voltage supply		00 = Without coil		OB = 12V DC		AD = 13V DC		OC = 24V DC		AC = 27V DC		OD = 48V DC		OE = 110V DC																																																			
Assembly	0 = Single diverter																																																																																																		
2 = 2 Pre-assembled diverters																																																																																																			
3 = 3 Pre-assembled diverters																																																																																																			
4 = 4 Pre-assembled diverters																																																																																																			
Electric connections																																																																																																			
00 = Without coil																																																																																																			
01 = With coil, without connector																																																																																																			
02 = With coil and with non-assembled connector, type DIN 43650 – ISO 4400																																																																																																			
03 = With coil having AMP Junior connector																																																																																																			
04 = With coil having AMP Junior Horiz. connector																																																																																																			
07 = With coil having DEUTSCH DT 04-2P connect.																																																																																																			
31 = With coil and bipolar sheathed lead 350mm [13.8"] long																																																																																																			
Voltage supply																																																																																																			
00 = Without coil																																																																																																			
OB = 12V DC																																																																																																			
AD = 13V DC																																																																																																			
OC = 24V DC																																																																																																			
AC = 27V DC																																																																																																			
OD = 48V DC																																																																																																			
OE = 110V DC																																																																																																			
	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td>00 =</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>OB =</td> <td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td> </tr> <tr> <td>AD =</td> <td></td><td>■</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>OC =</td> <td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td> </tr> <tr> <td>AC =</td> <td></td><td>■</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>OD =</td> <td></td><td></td><td>■</td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>OE =</td> <td></td><td></td><td></td><td></td><td>■</td><td>■</td><td>■</td><td>■</td><td>■</td> </tr> <tr> <td></td> <td>31</td><td>07</td><td>04</td><td>03</td><td>02</td><td>01</td><td>00</td><td></td><td></td> </tr> <tr> <td></td> <td colspan="8">Available connections</td> <td></td> </tr> </table>									00 =										OB =	■	■	■	■	■	■	■	■	■	AD =		■								OC =	■	■	■	■	■	■	■	■	■	AC =		■								OD =			■							OE =					■	■	■	■	■		31	07	04	03	02	01	00				Available connections								
00 =																																																																																																			
OB =	■	■	■	■	■	■	■	■	■																																																																																										
AD =		■																																																																																																	
OC =	■	■	■	■	■	■	■	■	■																																																																																										
AC =		■																																																																																																	
OD =			■																																																																																																
OE =					■	■	■	■	■																																																																																										
	31	07	04	03	02	01	00																																																																																												
	Available connections																																																																																																		

Spool variants



Principles of operation, cross section

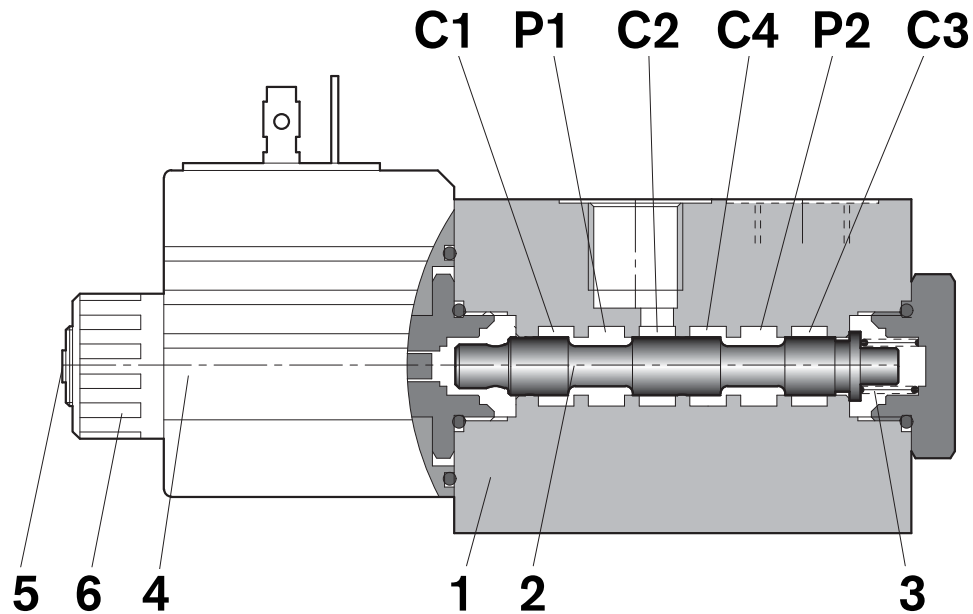
A valve basically consists of a housing (1), a control spool (2), a return spring (3) and a solenoid (4). It is designed to connect two inlet lines P1 – P2 (normally a set of hoses) and divert them to either the outlet ports (C1 – C4) with spool in position "0", when the solenoid is de-energized, or to the outlet ports (C2 – C3) with spool in position "1", when the solenoid is energized.

With the coil de-energized, the return spring (3) pushes back the spool (2) and holds it in position "0"

The coil (4) is fastened to the tube by the ring nut (6).

The manual override (5) allows to shift the spool (2) also in case of voltage shortage.

Hydraulic / pneumatic pilot control for spool shifting is available upon request.



Technical Data (for applications with different specifications consult us)

General

Valve weight	kg [lbs]	1.13 [2.5]
Mounting position		unrestricted
Ambient Temperature	°C [°F]	-20....+50 [-4....+122] (NBR seals)

Hydraulic

Maximum pressure with external drain	bar [psi]	310 [4500]
Maximum pressure with internal drain	bar [psi]	250 [3625]
Maximum inlet flow	l/min [gpm]	20 [5.3]
Hydraulic fluid		Mineral oil based hydraulic fluids HL (DIN 51524 part 1). Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.
Fluid Temperature	°C [°F]	-20....+80 [-4....+176] (NBR seals)
Permissible degree of fluid contamination		ISO 4572: $\beta_x \geq 75$ X=12...15 ISO 4406: class 20/18/15 NAS 1638: class 9
Viscosity range	mm ² /s	5....420
Internal leakage with 100 bar [1450 psi] secondary pressure at C	cc/min [in ³ /min]	min.7 [0.43] max. 15 [0.74]

Electrical


Voltage type	DC										
Voltage tolerance (nominal voltage)	%	-10 ... +10									
Duty	Continuous, with ambient temperature $\leq 50^{\circ}\text{C}$ [122°F]										
Maximum coil temperature	$^{\circ}\text{C}$ [$^{\circ}\text{F}$]	150 [302]									
Insulation class	H										
Compliance with	Low Voltage Directive LVD 73/23/EC (2006/95/EC), 2004/108/EC										
Coil weight with connection EN 175301-803	kg [lbs]	0.215 [0.44]									
Voltage	V	12	13	24	27	48	110				
Voltage type		DC	DC	DC	DC	DC	DC				
Power consumption	W	26	26	26	26	26	26				
Current ⁽¹⁾	A	2.15	2.00	1.10	1.00	0.54	0.27				
Resistance ⁽²⁾	Ω	5.5	6.5	22	28	89	413				

¹⁾ Nominal - ²⁾ $\pm 7\%$ at temperature 20°C [68°F]

	Voltage (V)	Connector type	Coil description	Marking	Coil Mat no.
=OB 01 =OB 02	12 DC	EN 175301-803 (Ex. DIN 43650)	C3601 12DC	12 DC	R933000044
=OB 03	12 DC	AMP JUNIOR	C3603 12DC	12 DC	R933000047
=OB 04	12 DC	AMP JUNIOR Horizontal	C3604 12DC	12 DC	R933002913
=OB 07	12 DC	DEUTSCH DT 04-2P	C3607 12DC	12 DC	R933000048
=OB 31	12 DC	Cable 350 mm long	C3631 12DC	12 DC	R933000045
=AD 01 =AD 02	13 DC	EN 175301-803 (Ex. DIN 43650)	C3601 13DC	13 DC	R933000051
=AD 07	13 DC	DEUTSCH DT 04-2P	C3607 13DC	13 DC	R933000049
=OC 01 =OC 02	24 DC	EN 175301-803 (Ex. DIN 43650)	C3601 24DC	24 DC	R933000053
=OC 03	24 DC	AMP JUNIOR	C3603 24DC	24 DC	R933000057
=OC 04	24 DC	AMP JUNIOR Horizontal	C3604 24DC	24 DC	R933002914
=OC 07	24 DC	DEUTSCH DT 04-2P	C3607 24DC	24 DC	R933000058
=OC 31	24 DC	Cable 350 mm long	C3637 24DC	24 DC	R933000055
=AC 01 =AC 02	27 DC	EN 175301-803 (Ex. DIN 43650)	C3601 27DC	27 DC	R933000056
=AC 07	27 DC	DEUTSCH DT 04-2P	C3607 27DC	27 DC	R933000050
=OD 01 =OD 02	48 DC	EN 175301-803 (Ex. DIN 43650)	C3601 48DC	48 DC	R933000059
=OD 04	48 DC	AMP JUNIOR Horizontal	C3604 48DC	48 DC	R933002915
=OE 01 =OE 02	110 DC	EN 175301-803 (Ex. DIN 43650)	C3601 110DC	110 DC	R933000061

Characteristic curves

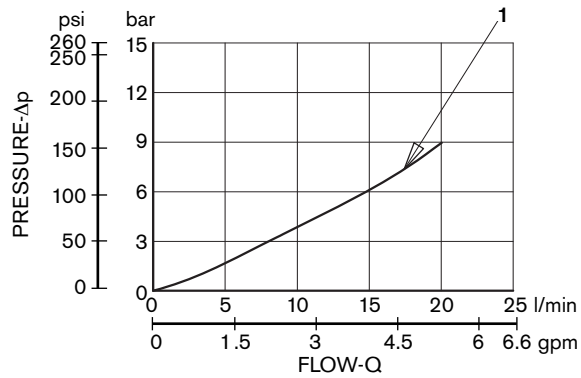
Measured with hydraulic fluid ISO-VG32 at $45^{\circ} \pm 5^{\circ} \text{ C}$ [$113^{\circ} \pm 9^{\circ} \text{ F}$]; ambient temperature 20° C [68° F].



Flow path	Curve No.
P1>C1	1
P1>C2	1
P2>C3	1
P2>C4	1

DI-DE performance limits

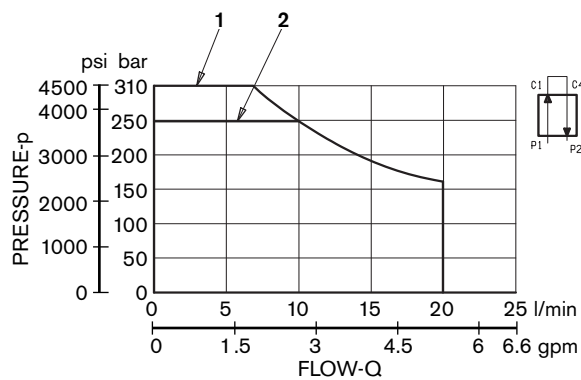
The performance limits refer to the following conditions: coils at operating temperature, voltage supply 10% below nominal, no back pressure in the tank line.



Drain type	Curve No.
External (-E-)	1
Internal (-I-)	2

Flow across both ways: forward across P1>C1 and reverse across C4>P2

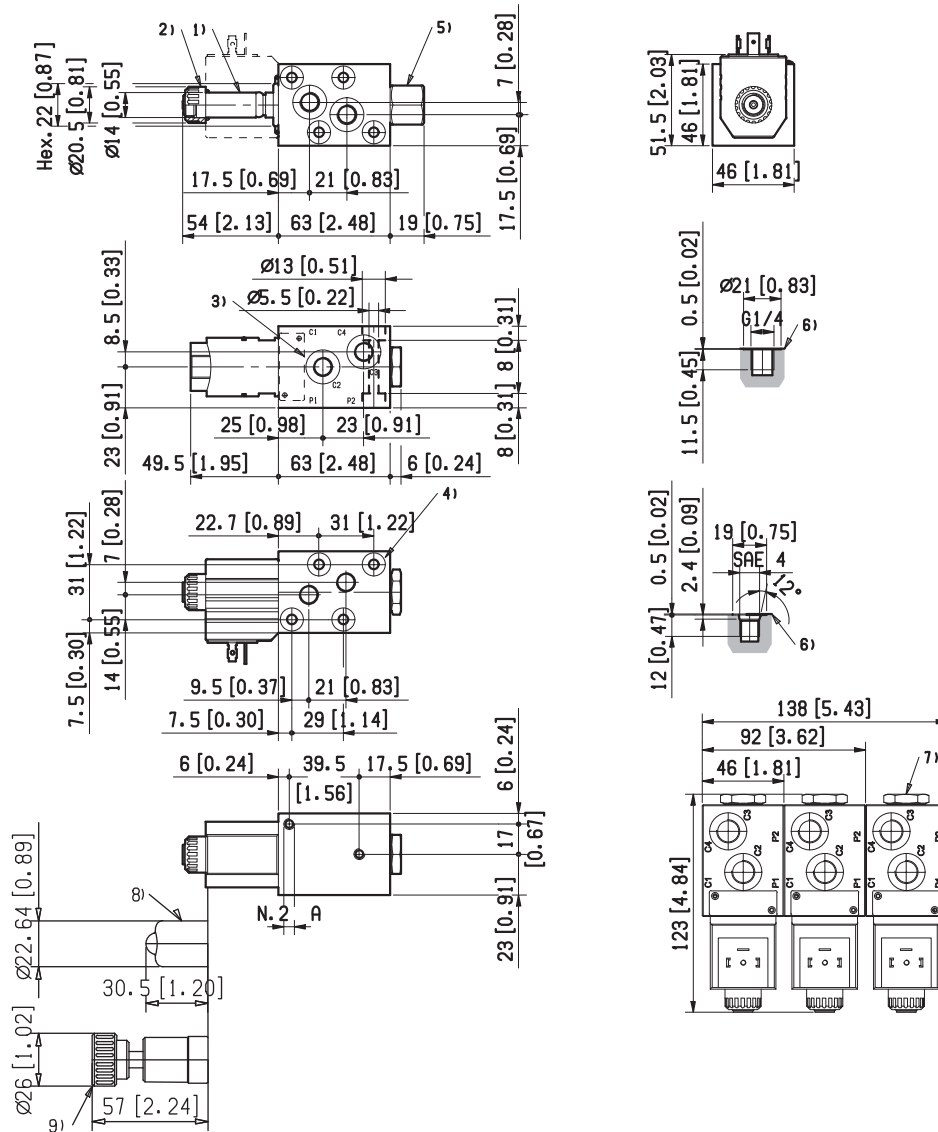External Dimensions and Fittings









Quota	VS120-F (G1/4)	VS125-F (SAE 4)
A	M6	1/4" - 20 UNC

Total stacked units	Total length mm [inch]	Total rods length mm [inch]	Torque Nm / ft-lb
2	92 [3.62]	85 [3.34]	6 [4.4]
3	138 [5.4]	130 [5.11]	6 [4.4]
4	184 [7.2]	175 [6.88]	6 [4.4]

- 1** Solenoid tube hex 22 mm.
Torque 20-22 Nm [14.6-16.2 ft-lb].
- 2** Ring nut for coil locking OD 20.5 mm [1.04 in].
Torque 3-4 Nm [2.2-3.0 ft-lb].
- 3** Identification label.
- 4** Four through holes for fixation. Use M5 screws with strength class DIN 8.8. Torque 5-6 Nm [3.6-4.4 ft-lb].
- 5** External drain plug available with G 1/4 and SAE6 port.
Hex 22 mm, torque 20-22 Nm [14.7-16,2 ft-lb].
- 6** Ports P1, P2, (without spot-facing) C1, C2 C3, C4.
- 7** Dimensions of assembly with 3 units.
- 8** Optional push-button, EP type, emergency for spool opening: it is pressure stuck to the ring nut for coil locking.
Mat no. R933000042.
- 9** Optional screw, EF type, emergency for spool opening: it is screwed (6-7 Nm [4.4-5.5 ft-lb]) to the tube as replacement of the coil ring nut. Mat no. R933000021.

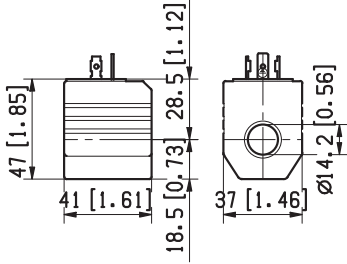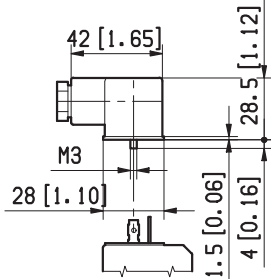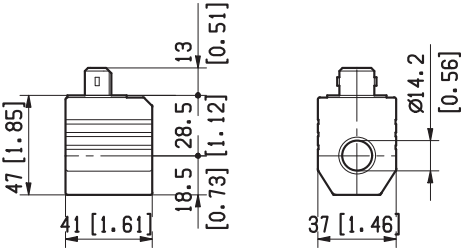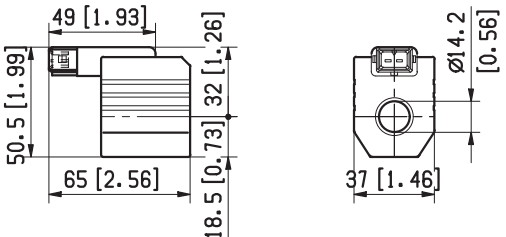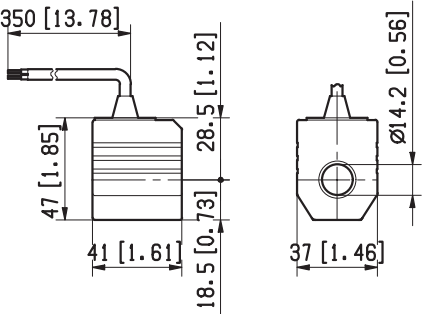Electric connection

<p>=00</p>	<p>Without coils, but with ring nut and O-Rings for coil fitting (solution recommended for flexible stock handling)</p> 	<p>=01</p>	<p>With coils having plug-in pins EN 175301-803, without connectors</p> 																		
<p>With coils and with connectors non-assembled, type EN 175301-803. Protection class: IP 65 when connector with seal is properly screwed down, and cable clamp is correctly tightened.</p> <p>182-09: Standard. 182-LED-T-A1: with LED monitoring presence of voltage. 182-09-G-DO-2-1: with VDR (Voltage Dependent Resistor), to prevent input voltage over-shootings.</p> <p>=02</p> <table border="1" data-bbox="272 913 815 1171"> <thead> <tr> <th>Mat. No.</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>R933002885</td> <td>182-09 GRAY</td> </tr> <tr> <td>R933002889</td> <td>182-09 BLACK</td> </tr> <tr> <td>R933002893</td> <td>182-LED-T-A1 12 DC</td> </tr> <tr> <td>R933002894</td> <td>182-LED-T-A1 24 DC</td> </tr> <tr> <td>R933002896</td> <td>182-LED-T-A1 48 DC</td> </tr> <tr> <td>R933002897</td> <td>182-LED-T-A1 110 DC</td> </tr> <tr> <td>R933002886</td> <td>182-09-G-DO-2-1 12DC with VDR</td> </tr> <tr> <td>R933002887</td> <td>182-09-G-DO-2-1 24DC with VDR</td> </tr> </tbody> </table> 				Mat. No.	Description	R933002885	182-09 GRAY	R933002889	182-09 BLACK	R933002893	182-LED-T-A1 12 DC	R933002894	182-LED-T-A1 24 DC	R933002896	182-LED-T-A1 48 DC	R933002897	182-LED-T-A1 110 DC	R933002886	182-09-G-DO-2-1 12DC with VDR	R933002887	182-09-G-DO-2-1 24DC with VDR
Mat. No.	Description																				
R933002885	182-09 GRAY																				
R933002889	182-09 BLACK																				
R933002893	182-LED-T-A1 12 DC																				
R933002894	182-LED-T-A1 24 DC																				
R933002896	182-LED-T-A1 48 DC																				
R933002897	182-LED-T-A1 110 DC																				
R933002886	182-09-G-DO-2-1 12DC with VDR																				
R933002887	182-09-G-DO-2-1 24DC with VDR																				
<p>=03</p>	<p>With coils having AMP Junior connector, and with bi-directional diode. Protection class: IP 65 with female connector properly fitted (see drawing).</p> 	<p>=04</p>	<p>With coils having Horizontal AMP Junior connector, and with bi-directional diode. Protection class: IP 65 with female connector properly fitted (see drawing).</p> 																		
<p>=31</p>	<p>With coils having bi-directional diode and bipolar sheathed free lead, 350 mm long, without pins.</p> 	<p>=07</p>	<p>With coils having DEUTSCH DT 04-2P connector, and with bi-directional diode. Protection class: IP 69 K with female connector properly fitted (see drawing).</p> 