
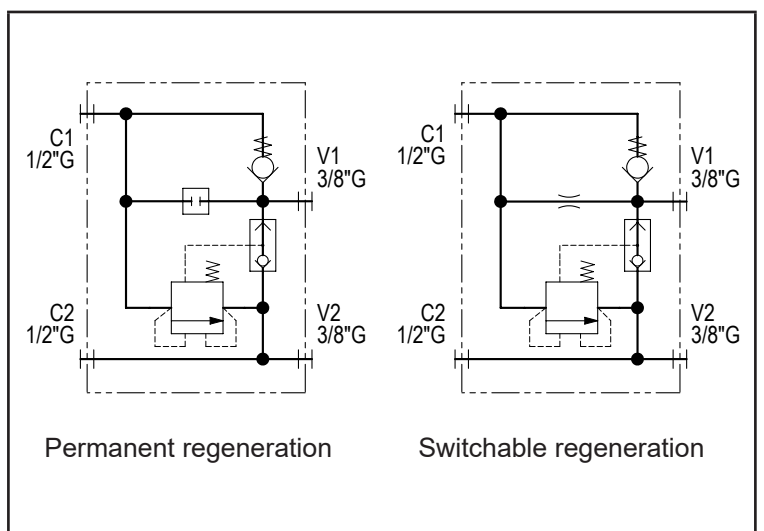


Dimensions in mm

Technical data	
Max. pressure	250 bar
Max. flow pump	30 lpm
Max. flow regenerated oil	About 90 lpm
Weight	1 Kg
Manifold material	Aluminium
V1 / V2 ports	3/8" G
C1 / C2 ports	1/2" G

N°	Description	Q.ty
1	Ø 8,5 through hole for mounting	2

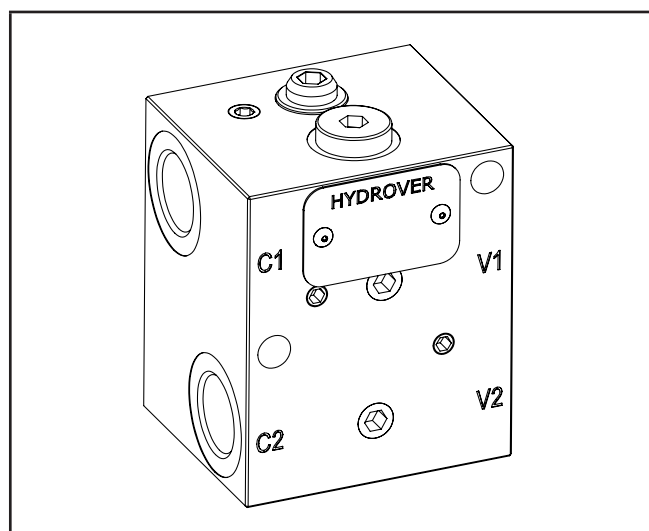

Ordering code

H	1	7	0	9	6	A	-	_	_
---	---	---	---	---	---	---	---	---	---

**Hydrover product**

**Product series**

17 series - Inline valves

**Product ID**

**Manifold material**

Aluminium

RP =

RE =

**Regeneration type**

Permanent regeneration

Switchable regeneration

**Note:**

The regenerative system increases the speed but reduces the strength of the cylinder, since the oil pressure is only exerted on the rod section.

With the permanent regeneration, if the strength is insufficient, the movement will stop. With the switchable regeneration the orifice leakage will allow the piston rod chamber to relieve the pressure and then the oil pressure will be exercised on the full section of the cylinder.

Before opting for the switchable regeneration, it is recommended to check whether this increase in strength can be sustained by the machine facilities.

**Hydraulic schematic example for log splitter**

