
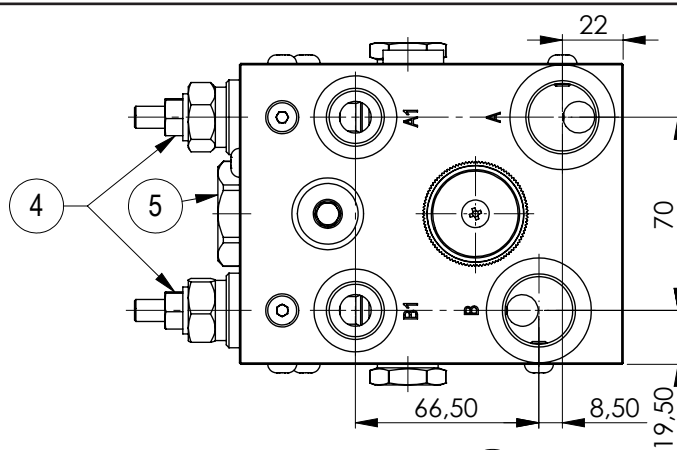
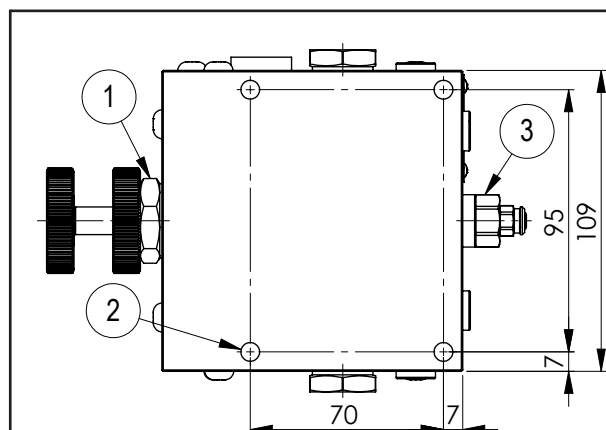
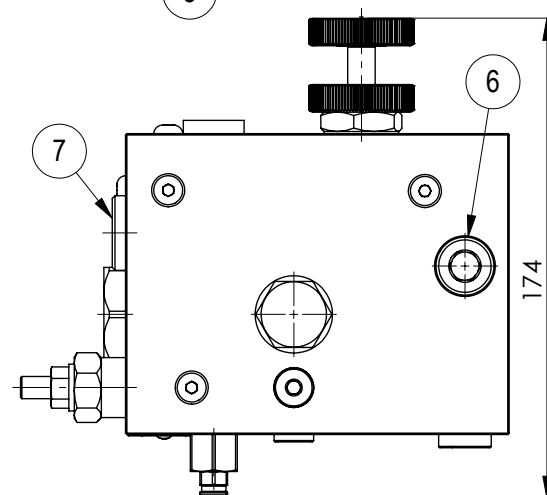
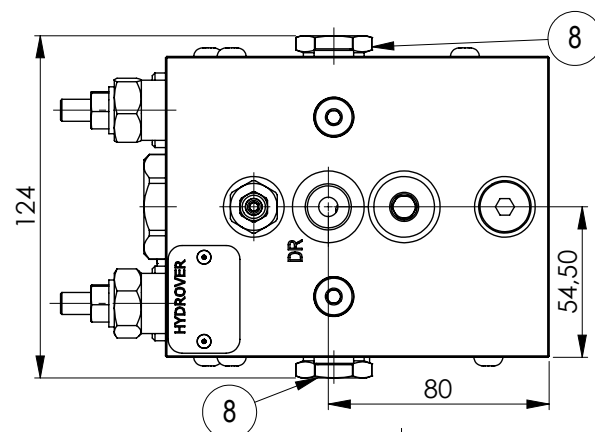
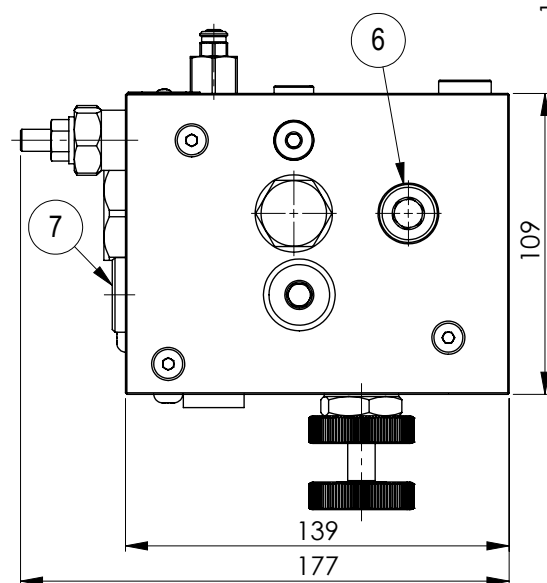


In-line 3-way compensated bidirectional flow control valve for motor relief / double-acting anti-cavitation

H17186

Dimensions in mm

Technical data	
Max. pressure	250 bar
Max. inlet flow (E)	80 lpm
Max. regulated flow (R)	6 bar spring 50 lpm 12 bar spring 70 lpm
Weight	5 Kg
Manifold material	Aluminium
DR port	3/8" G
A1 / B1 ports	1/2" G
A / B ports	3/4" G

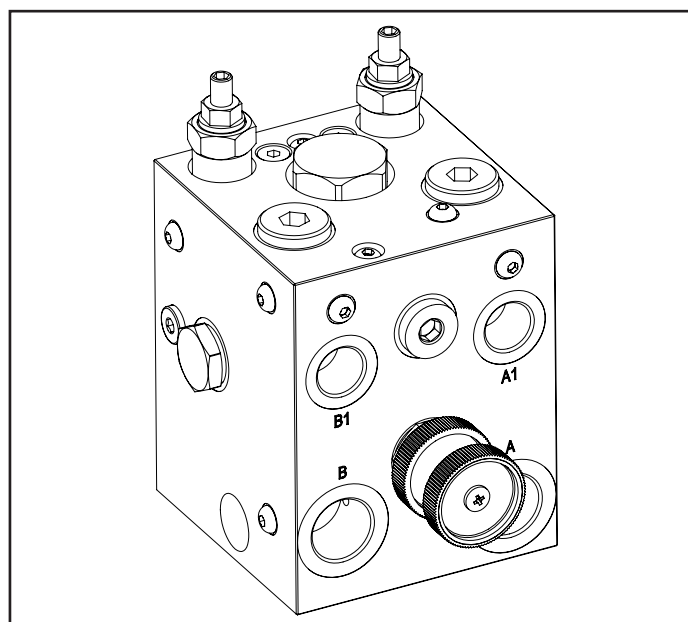

N°	Description	Q.ty
1	Bosch Rexroth flow restrictor	1
2	M8x12 thread for mounting	4
3	Relief valve 100-250 bar	1
4	DN 9 logic element	2
5	DN 16 compensator	1
6	Bosch Rexroth check valve 0TU602009900000	2
7	Check valve	2
8	Bosch Rexroth check valve VU-SF-12	2

Hydrover product

Product series

Product ID

H

1

7

1

8

6

A

_

Compensator spring

Manifold material

6 =

1 =

6 bar

12 bar

Aluminium

It also works with closed-centre distributors.

