
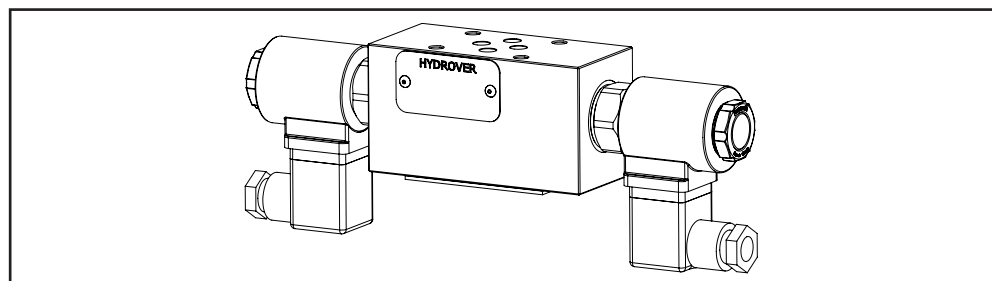


Dimensions in mm

Technical data	
Max. flow	60 lpm
With Aluminium manifold	
Max. pressure	250 bar
Weight	1,2 Kg
With steel manifold	
Max. pressure	350 bar
Weight	2,4 Kg

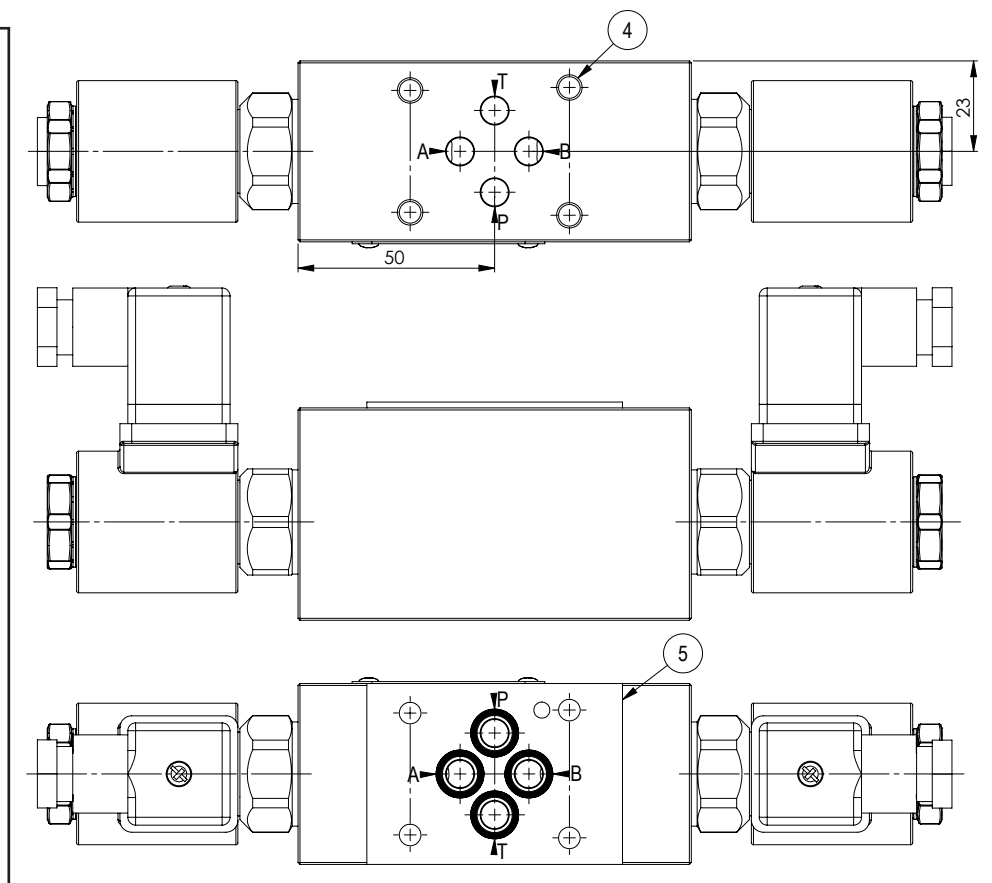

N°	Description	Q.ty
1	Bosch Rexroth solenoid valve VEI-16-10A-NC OD.15-X-36-Y-000000 (normally closed) or VEI-16-10A-NA OD.15-X-36-Y-000000 (normally open) *	2
2	Bosch Rexroth coil D36 - CLASS H DIN 43650 ISO 4400 *	2
3	Connector DIN 43650 ISO 4400	2
4	Ø 5,5 through hole for mounting	4
5	Seal plate	1

* for complete technical information, click on the blue link or go to the components section at the end of the catalogue

Ordering code



Hydrover product

Product series

39 series - Cetop 3 modular valves

Product ID

Manifold material

Aluminium
Steel

= A
= S

Solenoid valves spool type *

Normally open = NA
 Normally closed = NC
 Normally open double lock = 2A
 Normally closed double lock = 2C

Solenoid valves coil connection *

1 = DIN 43650 ISO 4400

Solenoid valve coil voltage *

OB = 12V DC
 OC = 24V DC
 OD = 48V DC
 OU = 110V RAC
 AH = 230V RAC

Solenoid valves manual override *

E0 = Without
 EP = Push (NA, 2A)
 EV = Screw (NC, 2C)
 EG = Push and twist (NA, 2A)

* Omit if not required. For example, to order the product without coils, omit the solenoid valves coil connection and coil voltage options: H3972A-NC-E0.

