

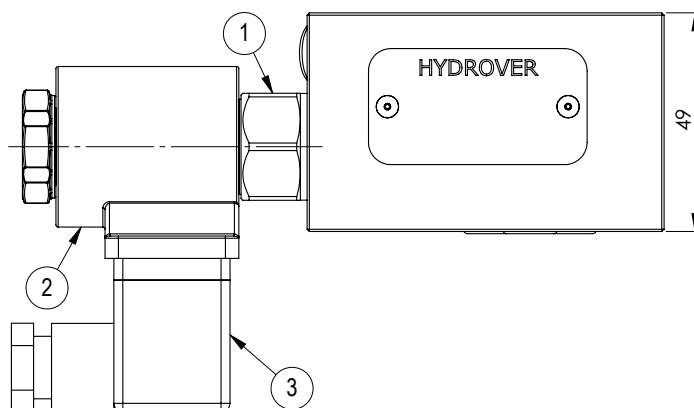
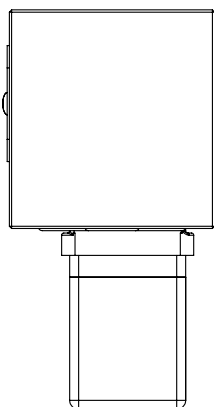
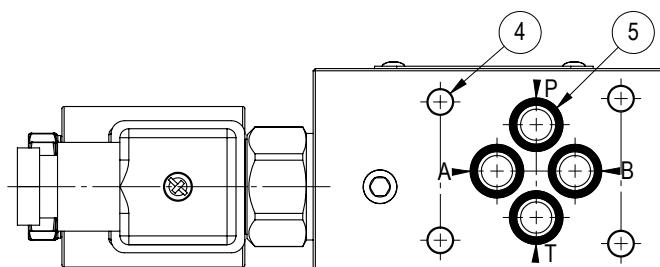
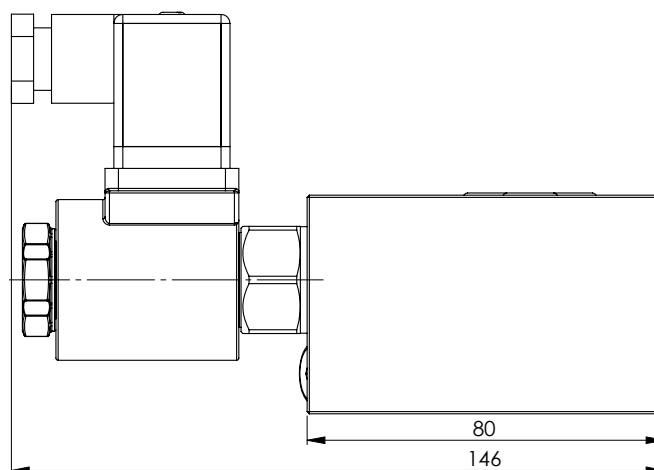


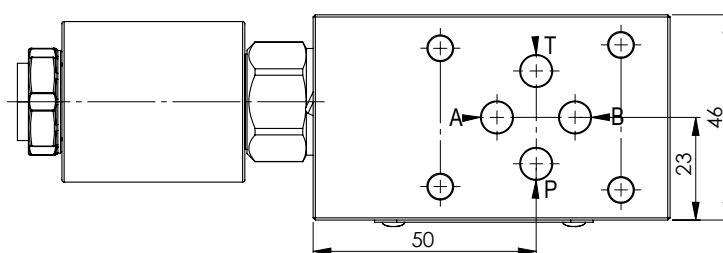

| Technical data    |           |
|-------------------|-----------|
| Max. flow         | 40 lpm *  |
| Max. pressure     | 250 bar   |
| Weight            | 0,8 Kg    |
| Manifold material | Aluminium |

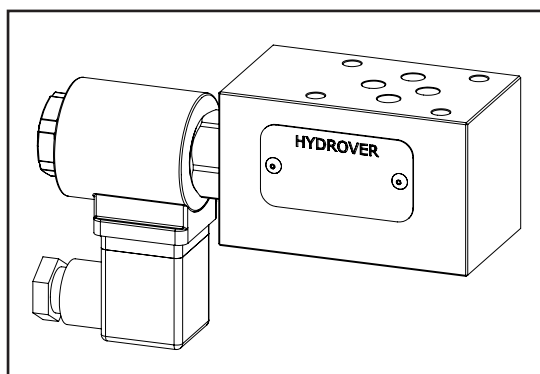

| N° | Description                                                                                                                                                                            | Q.ty |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1  | Bosch Rexroth solenoid valve <b>VEI-16-08A-NC OD.15-X-18-Y-000000</b> (normally closed) or <b>VEI-16-08A-NA OD.15-X-18-Y-000000</b> (normally open) depicted without manual override * | 1    |
| 2  | Bosch Rexroth coil <b>D36</b> - CLASS H DIN 43650 ISO 4400 *                                                                                                                           | 1    |
| 3  | Connector DIN 43650 ISO 4400                                                                                                                                                           | 1    |
| 4  | Ø 5,5 through hole for mounting                                                                                                                                                        | 4    |
| 5  | OR 108 i. Ø 8,73 cross section 1,78                                                                                                                                                    | 4    |

*\* for complete technical information, click on the blue link.*

Ordering code

|   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| H | 3 | 9 | 8 | 3 | - | - | - | - | - | - | - | - |
|---|---|---|---|---|---|---|---|---|---|---|---|---|

Hydrover product

Product series  
39 series - Cetop 3 modular valves

Product ID

Manifold material  
Aluminium = A  
Steel = S

Solenoid valve spool type \*  
Normally open = NA  
Normally closed = NC  
Normally open double lock = 2A  
Normally closed double lock = 2C

Solenoid valve coil connection \*  
1 = DIN 43650 ISO 4400

Solenoid valve coil voltage \*  
OB = 12V DC  
OC = 24V DC  
OD = 48V DC  
OU = 110V RAC  
AH = 230V RAC

Solenoid valve manual override \*  
E0 = Without  
EP = Push (NA, 2A)  
EV = Screw (NC, 2C)  
EG = Push and twist (NA, 2A)

\* Omit if not required. For example, to order the product without coil, omit the solenoid valve coil connection and coil voltage options: H3983A-NC-E0.

