


Cetop 3 modular poppet type solenoid operated directional valves
between A and T / B and T / 40 lpm

H3999

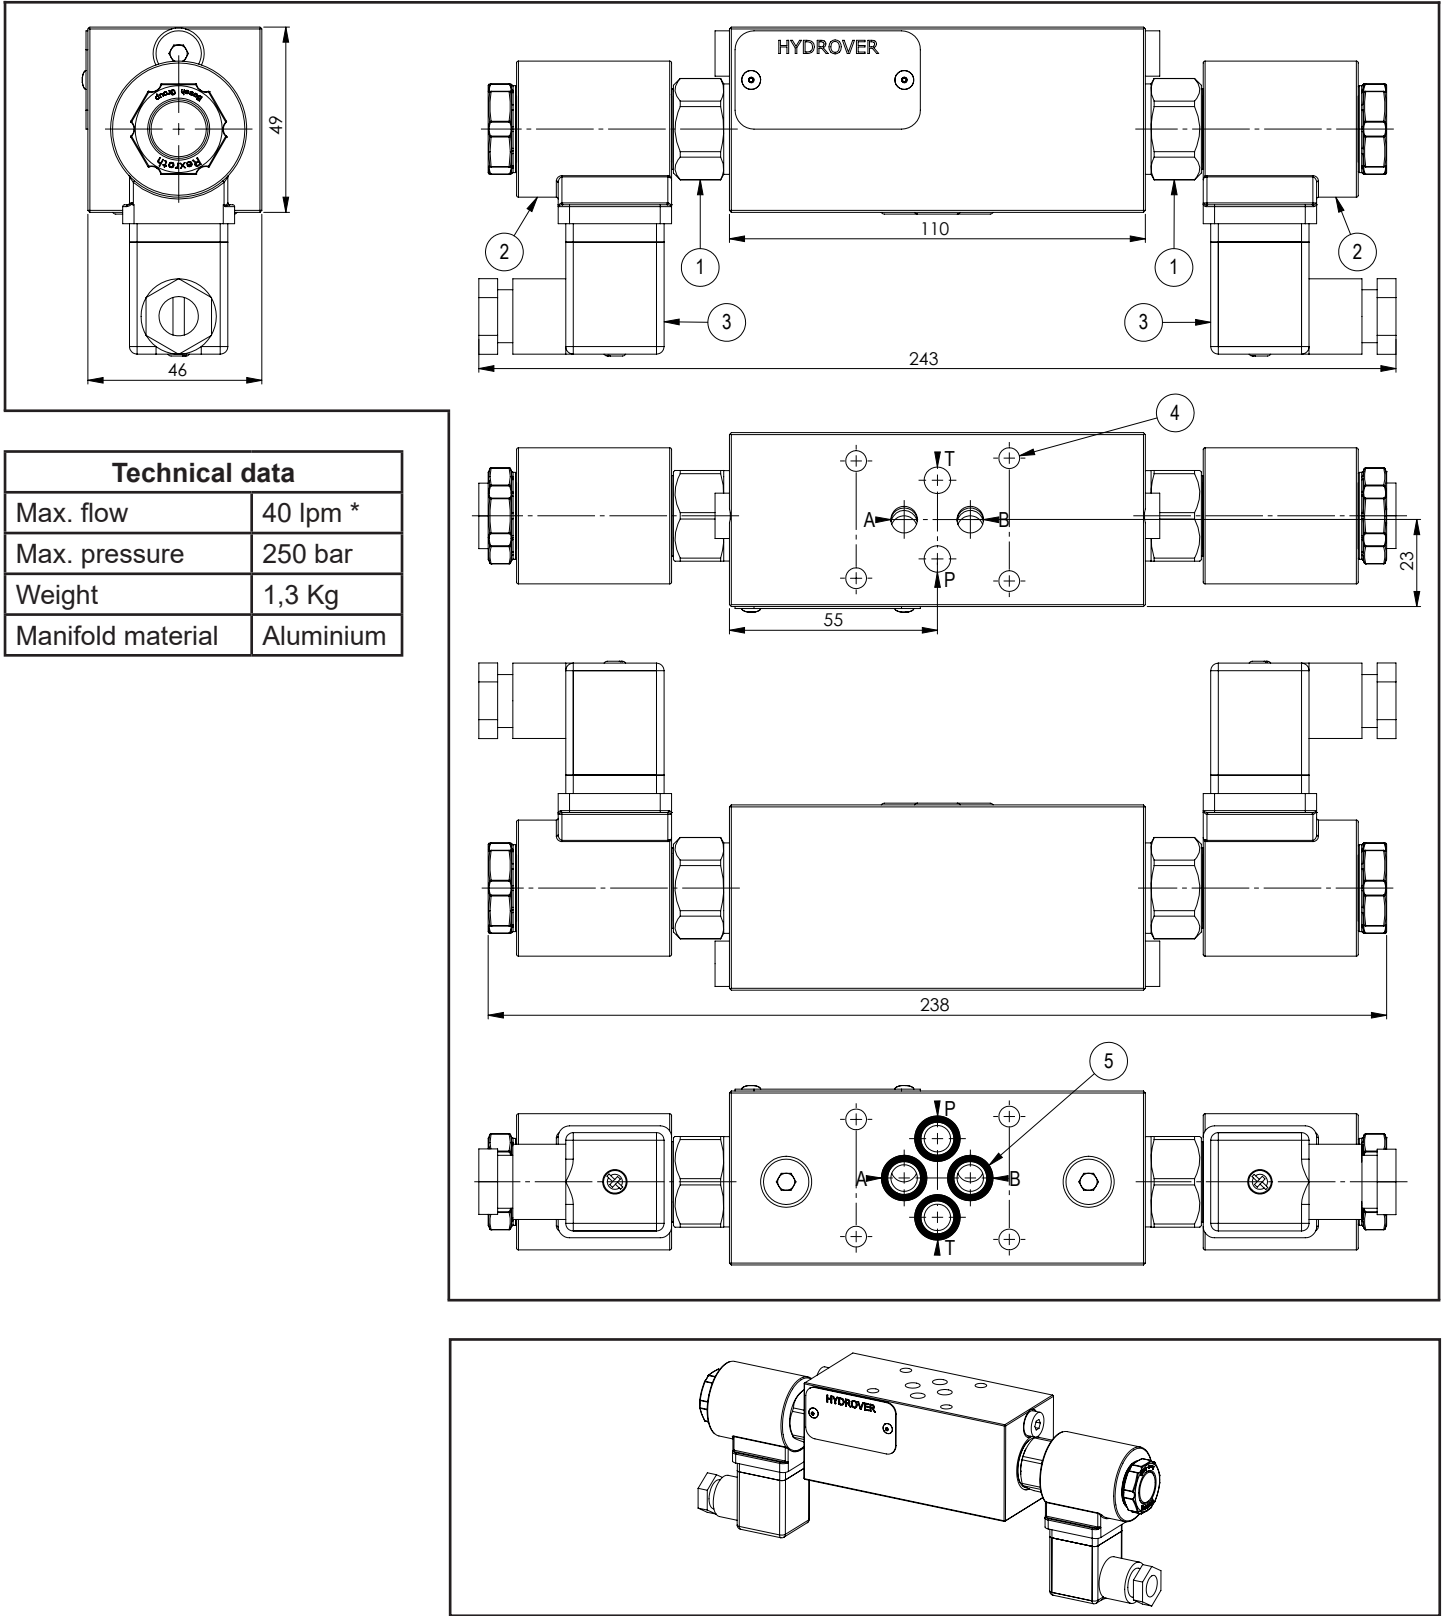

N°	Description	Q.ty
1	Bosch Rexroth solenoid valve VEI-16-08A-NC OD.15-X-18-Y-000000 (normally closed) or VEI-16-08A-NA OD.15-X-18-Y-000000 (normally open) depicted without manual override *	2
2	Bosch Rexroth coil D36 - CLASS H DIN 43650 ISO 4400 *	2
3	Connector DIN 43650 ISO 4400	2
4	Ø 5,5 through hole for mounting	4
5	OR 108 i. Ø 8,73 cross section 1,78	4

Ordering code

H	3	9	9	9	A	-	-	-	-	-	-	-
---	---	---	---	---	---	---	---	---	---	---	---	---

Hydrover product

Product series
39 series - Cetop 3 modular valves

Product ID

Manifold material
Aluminium

Solenoid valves spool type *
Normally open = NA
Normally closed = NC
Normally open double lock = 2A
Normally closed double lock = 2C

Solenoid valves coil connection *
1 = DIN 43650 ISO 4400

Solenoid valves coil voltage *
OB = 12V DC
OC = 24V DC
OD = 48V DC
OU = 110V RAC
AH = 230V RAC

Solenoid valves manual override *
E0 = Without
EP = Push (NA, 2A)
EV = Screw (NC, 2C)
EG = Push and twist (NA, 2A)

* Omit if not required. For example, to order the product without coils, omit the solenoid valves coil connection and coil voltage options: H3999A-NC-E0.

