

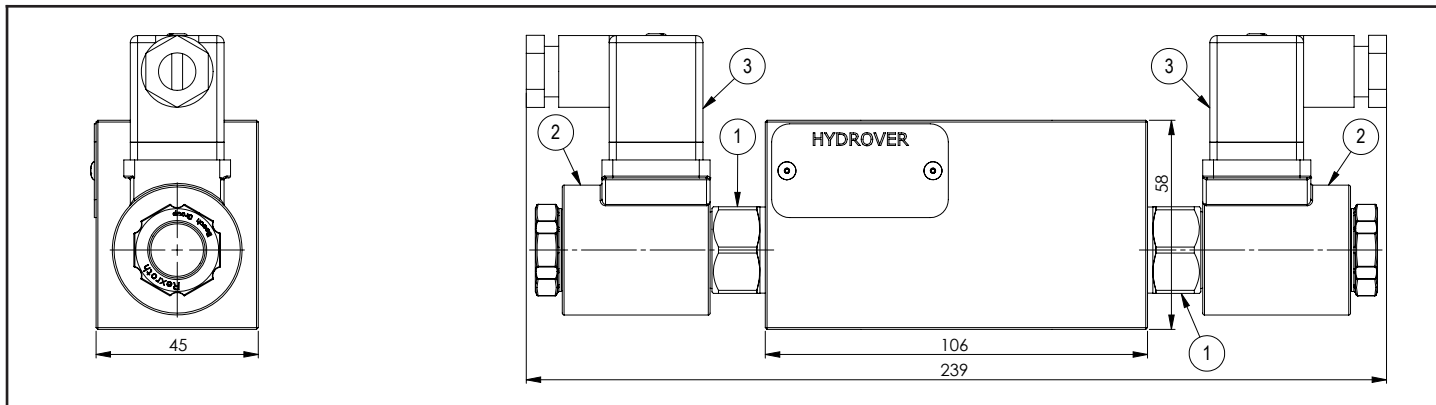


Dimensions in mm

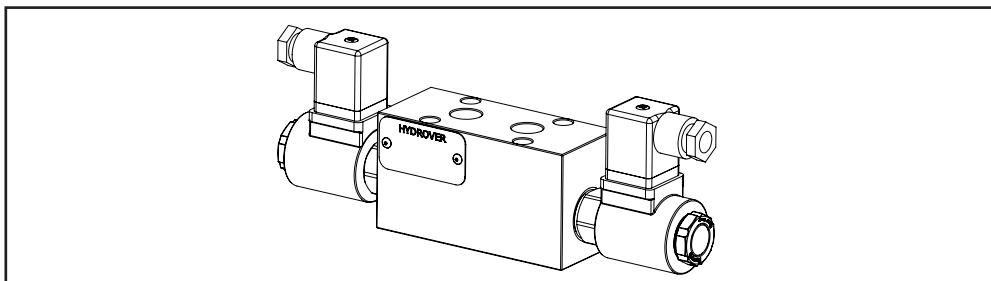

Technical data	
Max. pressure	250 bar
Max. flow	40 lpm
Weight	1,1 Kg
Manifold material	Aluminum

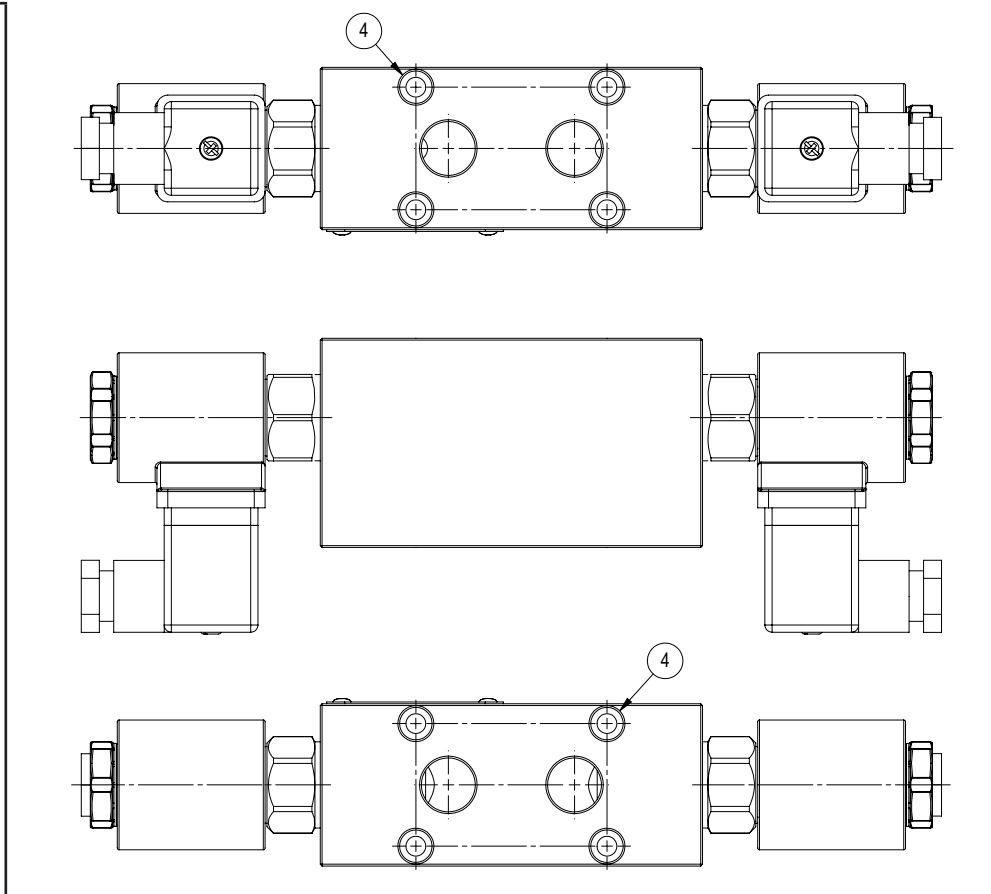

N°	Description	Q.ty
1	Bosch Rexroth solenoid valve VEI-16-08A-NC OD.15-X-18-Y-00000 (normally closed) or VEI-16-08A-NA OD.15-X-18-Y-00000 (normally open) depicted without manual override *	2
2	Bosch Rexroth coil D36 - CLASS H DIN 43650 ISO 4400 *	2
3	Connector DIN 43650 ISO 4400	2
4	Ø 5,5 through hole with counterbore for mounting	4

* for complete technical information, click on the blue link or go to the components section at the end of the catalogue

Ordering code



Hydrover product

Product series

49 series - Flangeable elements for Bosch Rexroth ED bankable valves

Product ID

Manifold material

Aluminum

Solenoid valves spool type *

- Normally open = NA
- Normally closed = NC
- Normally open double lock = 2A
- Normally closed double lock = 2C

Solenoid valves coil connection *

1 = DIN 43650 ISO 4400

Solenoid valve coil voltage *

- OB = 12V DC
- OC = 24V DC
- OD = 48V DC
- OU = 110V RAC
- AH = 230V RAC

Solenoid valves manual override *

- E0 = Without
- EP = Push (NA, 2A)
- EV = Screw (NC, 2C)
- EG = Push and twist (NA, 2A)

* Omit if not required. For example to order the product without the coils, omit the solenoid valves coil voltage and coil connection options: H4904A-NC-E0.

