


Dimensions in mm


Technical data	
Max. pressure	Aluminium: 250 bar Steel: 350 bar
Max. flow	130 lpm
Weight	Aluminium: 3,6 Kg Steel: 7,7 Kg
Manifold material	Aluminium or steel

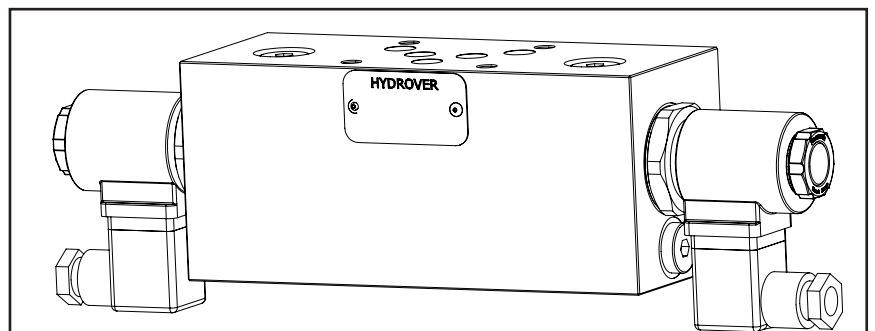

N°	Description	Q.ty
1	Bosch Rexroth solenoid valve VEI-16-021-NC OD.15-X-21-Y-000000 * (normally closed) or VEI-16-021-NA OD.15-X-21-Y-000000 * (normally open)	2
2	Bosch Rexroth coil D36 - CLASS H DIN 43650 ISO 4400 *	2
3	Connector DIN 43650 ISO 4400	2
4	Ø 6,5 through hole for mounting	4
5	OR 2050 i. Ø 12,42 cross section 1,78	5

* for complete technical information, click on the blue link or go to the components section at the end of the catalogue

Ordering code



Hydrover product

Product series

59 series - Cetop 5 modular valves

Product ID

Manifold material

Aluminium = A
Steel = S

Solenoid valve spool type *

Normally open = NA
Normally closed = NC
Normally open double lock = 2A
Normally closed double lock = 2C

Solenoid valves coil connection *

1 = DIN 43650 ISO 4400

Solenoid valve coil voltage *

OB = 12V DC
OC = 24V DC
OD = 48V DC
OU = 110V RAC
AH = 230V RAC

Solenoid valves manual override *

E0 = Without
EP = Push (NA, 2A)
EV = Screw (NC, 2C)
EG = Push and twist (NA, 2A)

* Omit if not required. For example, to order the product without coils, omit the solenoid valves coil connection and coil voltage options: H5911A-NC-E0.

