




**SOLENOID OPERATED VALVES
2 WAY CARTRIDGE IN MANIFOLD
CAVITY 018-E**

VEI-C-06-1

OE.15 - K - Y

DENOMINAZIONE VALVOLA
VALVE DENOMINATION

CODICE D'ORDINAZIONE
ORDERING CODE

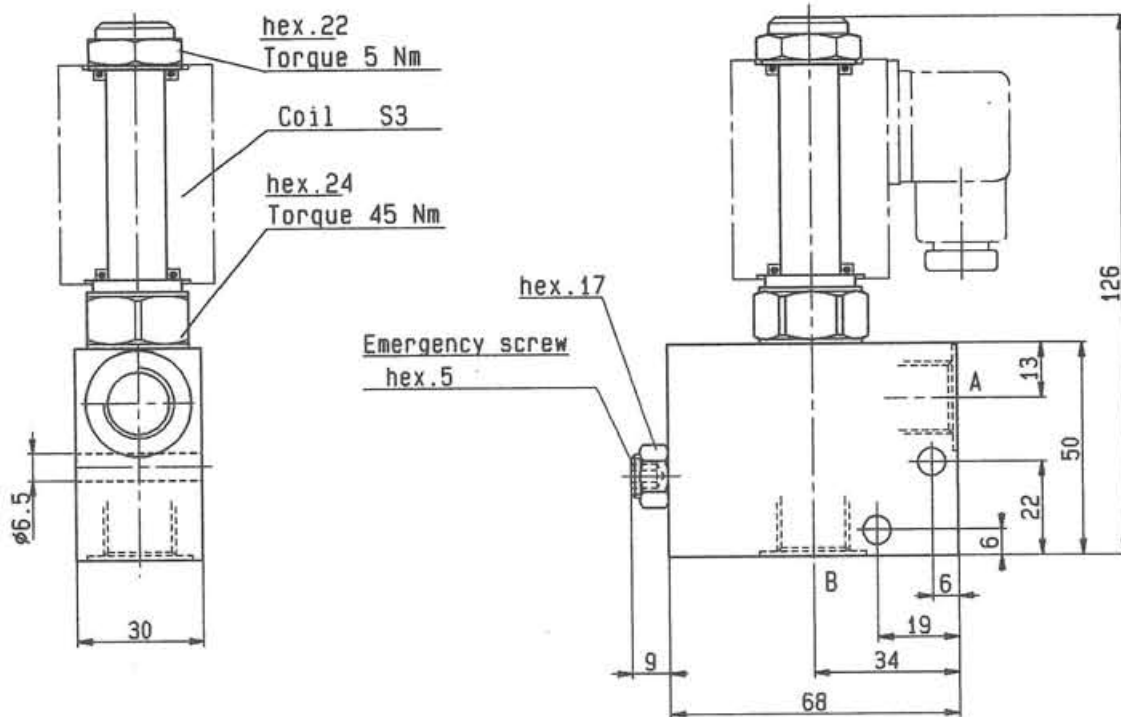

Pressione di lavoro max
250 bar

Peso Kg. 0.370

Max working pressure
250 bar

Weight Kg. 0.370

FEATURES

- See cartridge data sheets for curves, features and functional details.
- Emergency manifolds in high-strength aluminum TA-7020.
To order them see pag. F.01.03
- For working pressures up to 350 bar and for fatigue applications steel manifolds are available upon request.
To order them see pag. F.01.04

Y	ATTACCHI / PORT SIZE
	A - B
02	3/8"6
09	1/4"6

K	SCHEMA SYMBOL	FUNZIONI-FEATURES	
		POS I	POS II
POS I - BOBINA DISECCITATA - DEENERGIZED COIL POS II - BOBINA ECCITATA - ENERGIZED COIL			
13		A > B B > A	A > B B > A
14		A > B B > A	A > B B > A
31		A > B B > A	A > B B > A
32		A > B B > A	A > B B > A
<p>N.B. Per le funzioni nel riquadro Pressione minima apertura : 18 bar</p> <p>N.B. For features within box Minimum opening pressure : 18 bar</p>			