

End Elements basic

RE 18301-60

Edition: 02.2016 Replaces: 07.2012

TC-00-__-



Description

The outlet elements TC-00-_ are available in two versions:

- Body made of Black Anodized Aluminium (Al).
- Body made of Yellow Zinc plated (Cr+3) Cast Iron (CI). They are employed as end plates to plug the P and T channels of the ED elements of the Directional Valve Assembly, when there are no downstream operators.


Technical data


General		
Weight TC-00AL element	kg (lbs)	0.16 (0.35)
Weight TC-00Cl element	kg (lbs)	0.44 (0.96)
Ambient Temperature	°C (°F)	-20+50 (-4+122) (NBR seals)
Hydraulic		
Maximum pressure for aluminium version (AL)	bar (psi)	250 (3625)
Maximum pressure for Cast Iron version (CI)	bar (psi)	310 (4500)
Hydraulic fluid General properties: it must have physical lubricating and chemical properties suitable for use in hydraulic systems such as, for example:		Mineral oil based hydraulic fluids HL (DIN 51524 part 1). Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.
Fluid Temperature	°C (°F)	-20+80 (-4+176) (NBR)
Permissible degree of fluid contamination		ISO 4572: β _x ≥75 X=1215 ISO 4406: class 20/18/15 NAS 1638: class 9
Viscosity range	mm²/s	5420
		·-

Note


For applications with different specifications consult us

Ordering details

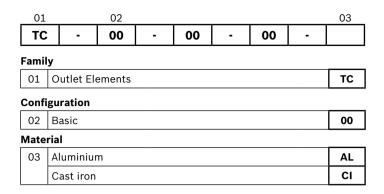

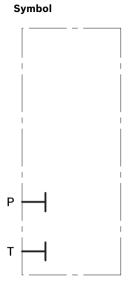

External dimensions and fittings

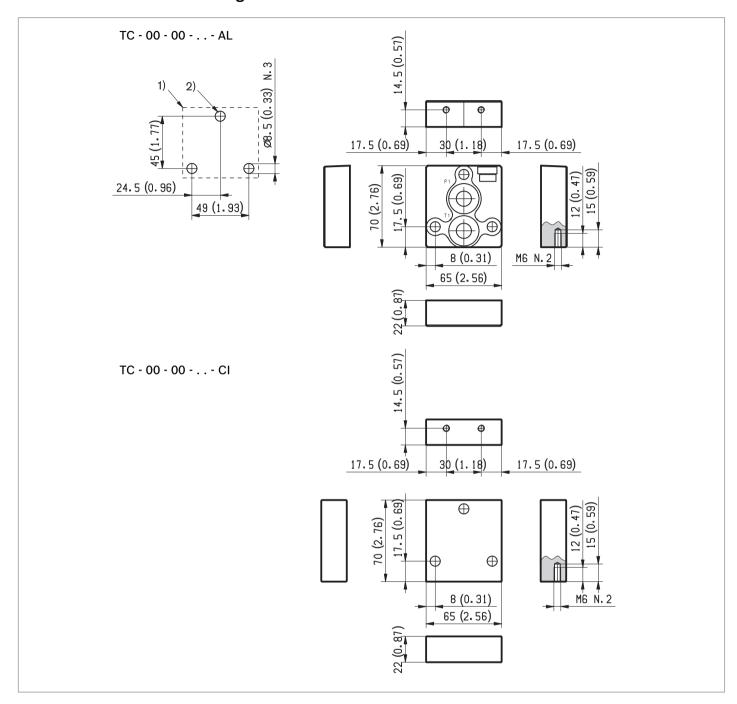

- 1 Flange specifications for coupling to the ED Directional Valve Elements.
- 2 For tie rod and tightening torque information see data sheet RE 18301-90.

4 **TC-00-_-** | End Elements basic

Bosch Rexroth Oil Control S.p.A.

Oleodinamica LC Division
Via Artigianale Sedrio, 12
42030 Vezzano sul Crostolo
Reggio Emilia - Italy
Tel. +39 0522 601 801
Fax +39 0522 606 226 / 601 802
compact-hydraulics-cdv@boschrexroth.com
www.boschrexroth.com/compacthydraulics

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth Oil Control S.p.a.. It may not be reproduced or given to third parties without its consent. The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Subject to change.